



Senior 1080 Expanded Beam Connector



SMPTE Compatible HD TV Connectors

Two Singlemode Expanded Beam Optical Channels

Two Size 20 Low Voltage Signal Contacts

Two Size 16 Auxiliary Electrical Contacts

Low Insertion Loss / High Return Loss

Rugged Hermaphroditic Design - No Adaptors

High Reliability / Durability

The Fibreco Senior 1080 hybrid fibre optic connector has been designed to incorporate all of the benefits of expanded beam technology and hermaphroditic coupling into a compact connector package suitable for the rigours of HD & SD TV outside broadcast applications.

The connector is compatible with standard SMPTE 311M composite fibre optic camera cable and meets the generic requirements of the SMPTE connector specification.

Fibreco advanced expanded beam technology has been proven over many years in military, mining and offshore applications and is widely used in the Live Audio Industry. Unlike butt-contact type connectors, the fibre is fully sealed and protected behind a hard glass lens, preventing contamination and degradation of the fibre over the system life. No routine maintenance is necessary and cleaning is achieved simply by wiping the lenses - there are no moving parts, alignment sleeves or adaptors. Electrical contacts are standard MIL-C-39029 gold plated crimp contacts.


The Fibreco Senior 1080 connector is available as a connector kit for customer termination or as terminated assemblies using SMPTE 311M camera cable. Assemblies can be supplied in custom lengths on a range of high quality steel AV cable reels.

Fibreco Senior 1080 expanded beam connectors offer unrivalled optical performance, superior reliability, durability and cost effectiveness for all TV outside broadcast applications.

Fibreco Limited
12 Fritch Industrial Estate
Chelmsford Road
Great Dunmow
Essex
CM6 1XJ



Tel: +44 (0) 1371 873334
Fax: +44 (0) 1371 876662
Email: sales@fibreco.co.uk
Web: www.fibreco.co.uk

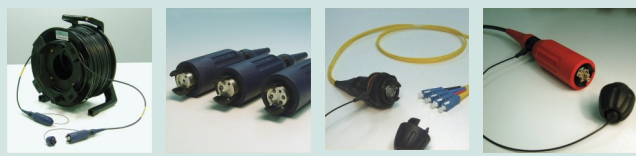

Senior 1080 Expanded Beam Connector - Outline Specification

Connector Specification:

Insertion Loss	9/125 Fibre at 1310nm / 1550nm : Typical -1.0dB - Maximum -1.5dB*
Return Loss	> 32dB (typical 40dB) singlemode*
Electrical: Auxiliary Power Contacts	Size 16 MIL-C-39029. 600VAC. 10A. Contact resistance <4mΩ.
Electrical: Signal Contacts	Size 20 MIL-C-39029. 42VAC. 1A. Contact resistance <4mΩ.
Electrical: Test Voltage	Between contacts and contact / housing: 3000V / 50Hz, 1 minute EN61984
Durability	3000 Matings minimum
Operating Temperature	-40°C to +85°C
Storage Temperature	-55°C to +85°C
Water Immersion	1m (IP67)
Free Fall Resistance	500 Falls from 1.2m height
Vibration	10-500Hz, 3 directions, 0.75mm amplitude@ 10g acceleration
Bump	4000 bumps @ 40g acceleration
Crush Resistance	3kN
Corrosion Resistance	500 Hours Salt Spray
Cable Retention	1000N (Cable Dependant)
Weight (approx)	Plug: 150g / Bulkhead: 120g
Connector Shell Material / Colour	Aluminium Black Anodised . Grip & boot: Black

